

ORNAMENTALS



STYLO S



Residential streets



Pedestrian areas



Parks and gardens



Bicycle lanes

STYLOSHISPALED






Environmental luminaire with avant-garde and vandal-proof design

VERSATILITY AND VANGUARDISM

Hispaled's Stylo S series is a modern design solution with an avant-garde touch, perfect for public lighting of streets, promenades, parks, squares or gardens.

Its double arm aesthetics allows the light point to be raised in height, improving on the one hand the levels of uniformity on the track, and making its design a perfect anti-vandalism solution.

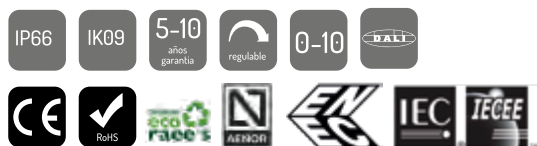

TECHNICAL DATA SHEET

ENEC 01; CE, RoHS; EN 60598-1:2009 + A1:2009; EN 60598-2-3:2003 + Corr:2005 + A1:2011; EN 62031:2009 + A1:2011; EN 62471:2008; IES LM-80; EN 61347-1:2008; EN 61347-2-13:2006; EN 55015:2006 + A1:2007 + A2:2009; EN 61547:2009; EN 61000-3-2:2006 + A1:2009 + A2:2009; EN 61000-3-3:2008; EN 61000-4-2,3,4,5,6,8,11; UL 8750; IEC 60598-1:2008; IEC 60598-2-3:2002; IEC 62031:2008; IEC 62471:2008; IES LM-80; IEC 61347-1:2008; IEC 61347-2-13:2006; IEC 55015:2006 + A1:2007 + A2:2009; IEC 61547:2009; IEC 61000-3-2:2006 + A1:2009 + A2:2009; IEC 61000-3-3:2008; IEC 61000-4-2,3,4,5,6,8,11; UL 8750;

The STS model offers solutions of up to 60W of power, guaranteeing optimal results in environmental applications, such as lighting of parks, squares, avenues, and other urban spaces. Its hemispherical structure of injected aluminum and its high degree of watertightness and protection against impacts, make it an anti-vandal and durable product, guaranteeing a useful life of the components of more than 100,000 hours of operation.

It is suitable for post-top or side-entry mounting, allowing inclination adjustment to adapt perfectly to the lighting needs of each track. It can be opened without tools, which facilitates installation at height for the installer, optionally allowing an electrical disconnection system when opening, which offers maximum safety when being handled.

It offers multiple lighting packages, with a wide range of photometric distributions and operating currents. It also allows "plug & play" installation of NEMA / ZHAGA socket compatible devices, which guarantees easy integration with point-to-point remote management systems.



TECHNICAL DATA SHEET

STYLO S

STYLO S*

SPECIFICATIONS


Structure	Aluminum injection
Diffuser	Tempered glass
Dimensions and weight	H 511 mm Ø 380 mm / 5Kg
Anchoring systems	Post-top Ø up to 80 mm
Degree of protection	IP66, IK09
Warranty	5/7/10 years
Certification	CE; RoHS
Safety class	I/II
Opening	Tool-free, with optional electrical disconnection.

OPTIONAL CONTROL SYSTEMS

Programmable regulation of up to 8 levels
 Time programming module
 (35 programs | reprogrammable from CM | winter-summer distinction)
 Point to point remote management RFLight₂
 DALI2/D4i, 1 -10V
 CLO (constant light level)
 Dimming at the head-end
 Control line dimming
 Photocell
 Socket NEMA 7 / Zhaga book 18
 Others: PLC, GPRS, 3G, NFC, NFC, Bluetooth, Narrow Band 5G

FEATURES*

Power	10W-60W
Efficiency lm/W	Up to 170 lm/W
Input voltage	90-305 V / ~ 50-60Hz (depending on model)
Power supply	PF > 0.95, Efficiency > 88% (depending on model)
Lifetime	>100,000 hours (L90B10)
LED Type	Cree®, Nichia®, Osram®
Color temperature	1,800 K - 6,000 K / PC-Amber / RGB
Minimum CRI	70/80
FHS	0%

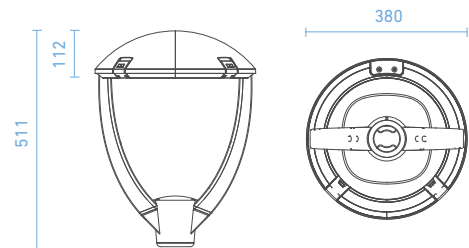

VERSIONS*

ECO

STANDARD

PREMIUM

- Included
- Optional
- ✗ Not available

OVERVOLTAGE PROTECTION

10 kV (en f. alim.)	●	✗	✗
10 kV (SPD ext.)	✗	●	●
20 kV (SPD ext.)	✗	○	○

REGULATION

8 Levels	●	●	✗
MPH (reprogrammable)	✗	○	●

OPERATING CURRENT

500 mA	○	○	●
700 mA	○	●	○
1000 mA	●	○	○

OPTICAL BLOCK

(Consult for more optical options)



ROAD I

Recommended distribution on tracks with extreme spacings up to 6 times the pole height

ROAD II

Recommended layout for roadways with a track width similar to the height of the height of the pole

ROAD III

Recommended layout for roadways with up to two lanes with spacings up to 4 times the pole height.

ROAD IV

Recommended distribution on tracks with high clearances of up to 5 times the height of the pole

URBAN 360

Recommended distribution for medium-height omnidirectional lighting, such as parks and squares

* Specifications are subject to change



ANDALUSIA
PALMA DEL CONDADO CITY COUNCIL (HUELVA)
Installation of Hispaled STYLO luminaires.